




FY-5300GT

5.3M print width, High Speed Solvent Printer
New and Upgraded

FY-5300GT

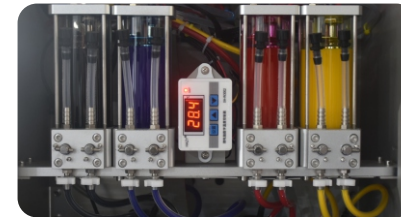

Negative pressure ink supply and heatable sub tanks, to supply stable and steady ink flow under all conditions.



High intensive cross-beam of 15cmx20cm steel, plus machine finished aluminium bar and double silent linear guide.



Sturdy frame structure to assure mechanic precision and printing resolution after long life of use.



Motor driven media spread roll: Media spread roll at front of the platform to accommodate all types PVC material of different thickness.



Pneumatic electric press handle: pneumatic electric controlled press handle of pinch rollers and grid rollers ease of stable operation.



3 individually controlled heaters from left to right under the platform with digital displayed temperature.



With 4 pcs of Alpha printhead, the latest technology from SPT, particularly designed for signage printing, featuring high performance and low affordability, 30Khz fire frequency, 25pl droplet size, duo colors per head. A perfect combo of speed and resolution.

Technical Specifications

Model	FY-5300GT			
Printhead	SPT Alpha 1024HG		SPT 508GS	
Number of Printhead	4		8	
Print width	5300mm			
* Print Speed	2 PASS	288m ² /h	3 PASS	180m ² /h
	3 PASS	192m ² /h	4 PASS	140m ² /h
	4 PASS	144m ² /h	6 PASS	90m ² /h

Ink: Solvent Ink 4 color (CMYK)

Media: Vinyl, Fiex, Polyester, Back-lit Film, Window Film, ect.

Printhead Height: Above Media Adjustable 2-8mm

Print Interface: RJ45

Heating&Drying System: Equipped(Infrared Ray+ Fan Drying)

RIP: United Fancy / Maintop

Air Pressure Requirement: Positive 8kg

Printer: AC220V 50HZ 6A 1500W

Dryer: AC220V 50HZ 32A 7200W

Platform heating: AC220V 50HZ 33A 7400W

Operation Environment: Temperature 15°C-32°C Humidity 35%-80%

Printer Dimension/Package Size: L7420mm×W1330mm×H1700mm
L7620mm×W1480mm×H1720mm



Light box advertising



Background



Ceiling



Wall Wrapping



Bill Board



Interior Decor