




# FY-2300TX

## 2.05M print width,Dye-sub Direct Printer For colorful flags and banners


## FY-2300TX

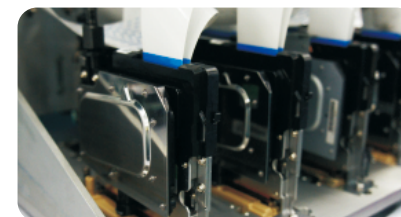


With 8 industrial piezo printhead at 7/12PL droplet to bring production speed of 127-140sqm per hour.



Degassed ink supplied in pouch.

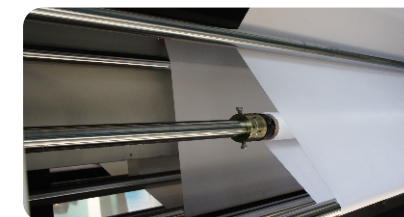

Perpetual tension-control feeding system to handle more types of mediachoice for more applications.

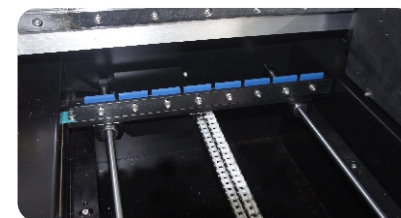

Automatic wiping system for easy printhead maintenance.



Automatic hot melting cutters.




Built-in color activator to fix color immediately after printing.

### Printhead Options:

SPT 508GS  
SPT 1024GS

SPT1024GS / SPT508GS industrial printhead, for stable printing performance and excellent ink compatibility.

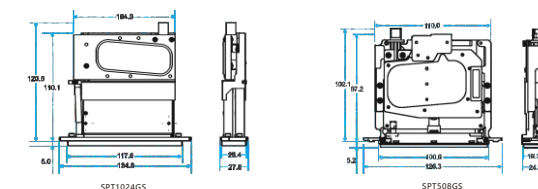

### Technical Specifications

Model		FY-2300TX / D8	FY-2300TX / F8
Printhead		SPT508GS	SPT1024GS
Number of Printhead		8	
Print Width		2050mm	
Print Speed *	4PASS	191m <sup>2</sup> /h	210m <sup>2</sup> /h
	6PASS	127m <sup>2</sup> /h	140m <sup>2</sup> /h
	8PASS	95m <sup>2</sup> /h	105m <sup>2</sup> /h
		63m <sup>2</sup> /h	70m <sup>2</sup> /h

Media Width: 2280mm

Type: Polyester fabric

Ink: Disperse ink

Ink supply system: Negative pressure ink supply

Cleaning and Maintenance system: Individual purging System,semi-auto capping

RIP: United Fancy

Optional: Air filter: 220V 2200W L600mm x W600mm x H1600mm  
Heat Welding Cut:Standard 3 pcs,optional 8 pcs

Heating System : Online high temperature color fixer

Print Interface: RJ45

Printer : AC220V 50HZ 5A 1150W

Dryer: AC220V 50HZ 25A 5380W

Printer Dmensions: L4100mm x W1244mm x H1465mm 888kg

Package Size: L4400mm x W1510mm x H1650mm 1300kg

1. The speed data are taken from the printer at high speed,a difference of 10% may occur when running with different computers.  
2. Product specifications are subject to change without notice in advance.Color and shape in picture are for reference,computer and monitor not included.All rights reserved!



Display Stand



Banner



Flag



Other