





# FY-3200TX

3.2M print width,Dye-sub Direct Printer  
High level light box,disply,signs printing

## FY-3200TX

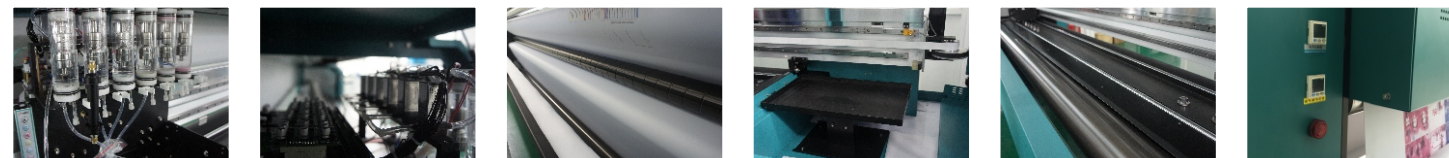

- 1 With 8 industrial piezo printhead at 7 droplet to bring production speed of 113 sqm per hour .
- 2 Two pieces of big size permanent tension control rollers employed to accommodate different types of media.
- 3 Automatically negative pressure maintained inside sub-tank.
- 4 Automatic wiping system for easy printhead maintenance.
- 5 Degas on the flow.



Industrial printhead SPT1024GS, print width of 72mm ensures productivity; variable droplets from 7pl to 42pl generates smooth printing on gradient.

### Technical Specifications

Model		FY-3200TX / F6	FY-3200TX / F8
Printhead		SPT1024GS	
Number of Printhead		6	8
Print Width		3200mm	
Print Speed *	3PASS	56.5m <sup>2</sup> /h	113m <sup>2</sup> /h
	4PASS	42.5m <sup>2</sup> /h	85m <sup>2</sup> /h
	6PASS	28m <sup>2</sup> /h	56m <sup>2</sup> /h

Media Width:	3300mm
Type:	Polyester fabric
Ink:	Disperse ink
Ink supply system:	Negative pressure ink supply
Cleaning and Maintenance system:	Individual Puring System, Automatic capping
RIP:	United Fancy
Optional:	Online degasification: 4-Way online degasification lung Air filter: 220V 2200W L600mm x W600mm x H1600mm Color fixer: 380V 12000W L4330mm x W600mm x H900mm

Air Pressure Requirement:	Positive 6KG
Print Interface:	RJ45
Printer:	AC220V 50HZ 9A 1980W
Dryer:	AC220V 50HZ 38A 8360W
Printer Dmensions:	L5277mm x W1512mm x H1778mm 1588kg
Package Size:	L5430mm x W1100mm x H2000mm 1945kg

1. The speed data are taken from the printer at high speed, a difference of 10% may occur when running with different computers.
2. Product specifications are subject to change without notice in advance. Color and shape in picture are for reference, computer and monitor not included. All rights reserved!



Display Stand



Banner



Light box advertising



Other