



# FY-UV2200W

2.2M print width, only roll to roll

Sophisticated technology in Simple design for Spectacular performance


## FY-UV2200W




High-strength printhead plate, with options of different color matches available.




Individually controlled negative pressure system for stable ink supply.

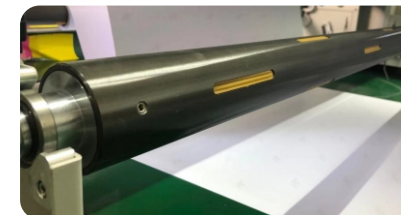


Pneumatically controlled feeding and take-up systems with extra large 260MM-diameter shaft.

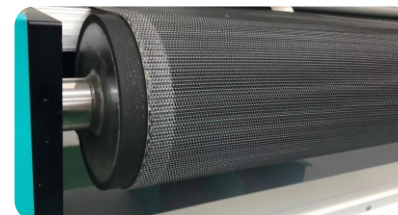

Double strengthful wallboard, extra large rubber roller.

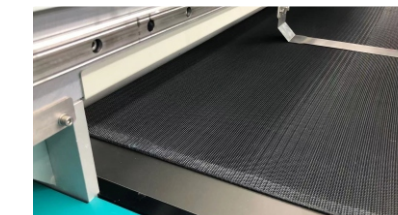

New belt feeding system to feed elastic media without distortion.

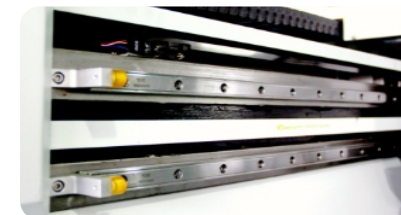

Double silent guide, for speedy and stable carriage moving.

Printhead Options:



✓ EPSON i3200



✓ SPT 1024GS



✓ Ricoh Gen 5 / Gen 6

### Technical Specifications

| Model                    |       | i3                   |                     | K3                   |                       | R5S                 |                     | R5                  |                     |
|--------------------------|-------|----------------------|---------------------|----------------------|-----------------------|---------------------|---------------------|---------------------|---------------------|
| Printhead                |       | EPSON i3200          |                     | F printhead          |                       | RICOH G6            |                     | RICOH G5            |                     |
| Print width              |       | 2200mm               |                     |                      |                       |                     |                     |                     |                     |
| Printhead Layout Options |       | Sandwich white       | Staggered colors    | Sandwich white       | Staggered colors      | Sandwich white      | Staggered colors    | Sandwich white      | Staggered colors    |
| Print Speed *            | 4PASS | /                    | /                   | /                    | /                     | 22m <sup>2</sup> /h | 41m <sup>2</sup> /h | 15m <sup>2</sup> /h | 29m <sup>2</sup> /h |
|                          | 6PASS | 6.6m <sup>2</sup> /h | 13m <sup>2</sup> /h | 7.6m <sup>2</sup> /h | 14.6m <sup>2</sup> /h | 14m <sup>2</sup> /h | 28m <sup>2</sup> /h | 11m <sup>2</sup> /h | 20m <sup>2</sup> /h |
|                          | 8PASS | 5m <sup>2</sup> /h   | 10m <sup>2</sup> /h | 5.5m <sup>2</sup> /h | 11m <sup>2</sup> /h   | 10m <sup>2</sup> /h | 18m <sup>2</sup> /h | 8m <sup>2</sup> /h  | 15m <sup>2</sup> /h |

Media width: 2300mm

Type: Vinyl, sticker, polyester, one-way vision, flex, banner in roll or sheet

Ink: UV Curable Ink

Ink supply system: Negative pressure ink supply

Curing method: LED UV Lamp

RIP: United Fancy

Air Pressure Requirement : Positive 6kg

Print Interface: USB 3.0

Printer: AC220V 50HZ 6.6A 1450W

Print Platform Vacuum Hold Down Area: AC220V 50HZ 10A 2200W

Operation Environment: Temperature 20°C-28°C Humidity 40%-60%

Printer Dimensions: L3955mm×W1035mm×H1500mm

- The speed data are taken from the printer at high speed, a difference of 10% may occur when running with different computers.
- Product specifications are subject to change without notice in advance. Color and shape in picture are for reference, computer and monitor not included. All rights reserved!



Light box advertising



Display Stand



Ceiling



Interior Decor



Leather printing



Window advertising